


## NP5875-U

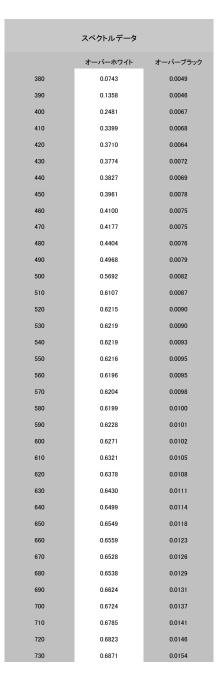

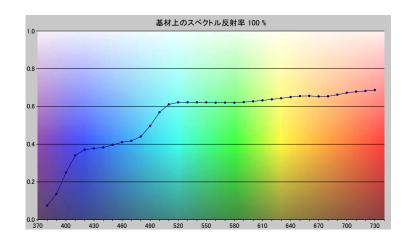

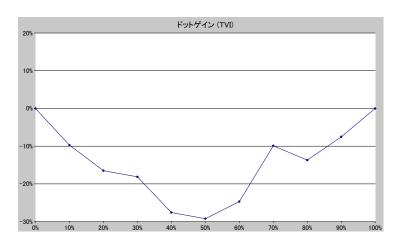

ホワイトの上のスポット							
ドット %	L*	a*	b*	C*	h°	TVI	
0	93.18	-0.15	0.14	0.20	137.40	0%	
10	92.83	-0.39	1.07	1.14	109.78	0%	
20	92.51	-0.58	1.86	1.95	107.29	4%	
30	92.20	-0.79	2.86	2.97	105.42	12%	
40	91.61	-1.11	4.28	4.42	104.50	12%	
50	90.76	-1.54	6.41	6.59	103.46	21%	
60	89.61	-2.04	8.95	9.18	102.82	35%	
70	88.16	-2.57	11.93	12.21	102.14	60%	
80	86.53	-2.97	14.68	14.98	101.44	66%	
90	85.28	-3.27	16.79	17.10	101.02	82%	
100	82.58	-3.64	20.54	20.86	100.04	100%	

	仕様
不透明度(Y 比率)	2%
スペクトル密度	1.13
ドットゲイン @ 50%	-29%
コントラスト @ 70%	7%
	測定値
測定器	i1iO 2
測定コンディション	, 2_Degree,
ジオメトリ	0.0/45.0
アパーチャ	

